

Prüfbericht-Nr.: <i>Test Report No.:</i>	50045614 008	Auftrags-Nr.: <i>Order No.:</i>	244320938	Seite 1 von 12 <i>Page 1 of 12</i>
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	29.03.2021	
Auftraggeber: <i>Client:</i>	Qitele Group Co., Ltd. Address: Xiaojing Industry Zone, Qiaoxia Town, Yongjia County, Wenzhou, Zhejiang 325106, P.R.China			
Prüfgegenstand: <i>Test item:</i>	Permanently installed outdoor fitness equipment			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	QTL-0501;QTL-0502;QTL-0503;QTL-0504;QTL-0505;QTL-0506;QTL-0507;QTL-0508; QTL-0509;QTL-0510;QTL-0511;QTL-0512;QTL-0513;QTL-0514;QTL-0515;QTL-0516			
Auftrags-Inhalt: <i>Order content:</i>	Certificate update			
Prüfgrundlage: <i>Test specification:</i>	EN 16630:2015 AfPS GS 2019:01 PAK			
Wareneingangsdatum: <i>Date of receipt:</i>	29.03.2021	Detaillierte Fotodokumentation Seite 3 und / oder Anlage zu diesem Bericht <i>Detailed photo documentation</i> page 3 and / or appendix to this report		
Prüfmuster-Nr.: <i>Test sample No.:</i>	Same as Type No.			
Prüfzeitraum: <i>Testing period:</i>	29.03.2021 – 10.08.2021			
Ort der Prüfung: <i>Place of testing:</i>	See other			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shanghai) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
10.08.2021	Bryan Chen / PE		11.08.2021	Terry Jin / TC
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>
Sonstiges / Other: 1. Place of testing: a. Hardline Laboratory Shanghai b. Qitele Group Co., Ltd. . 2. This report is for update from AfPS GS 2014:01 to AfPS GS 2019:01 PAK , and 5 years certificate update based on 50045614 001/003. Construction check and loading test was presformed with positive result. 3. Foreseeable use was considered. Currently neither a safeguard clause procedure has been invoked nor is an increase in accidents known for these products. 4. Attachment 1: PAHs checklist 5. Attachment 2: 2PfG 2516:2014-11				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Liste der verwendeten Prüfmittel
List of used test equipment

[illegible]

Prüfbericht-Nr.: 50045614 008
Test Report No.:

Seite 3 von 12
Page 3 of 12


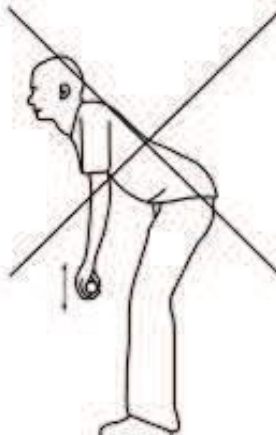
Produktbeschreibung
Product description

1	Produktdetails <i>Product details</i>	QTL-0501;QTL-0502;QTL-0503;QTL-0504;QTL-0505; QTL-0506;QTL-0507;QTL-0508;QTL-0509;QTL-0510; QTL-0511;QTL-0512;QTL-0513;QTL-0514;QTL-0515;QTL-0516 Max user weight:150 Kg For user has the height more than 1400 mm.
2	Maße / Gewicht <i>Dimensions / Weight</i>	QTL-0501: 1128mm x 896mm x 1306mm / 47.2 Kg QTL-0502: 1374mm x 828mm x 1188mm / 46 Kg QTL-0503: 880mm x 619mm x 1715mm / 37.9 Kg QTL-0504: 1535mm x 365mm x 1255mm / 42.1 Kg QTL-0505: 1040mm x 1009mm x 1445mm / 41.3 Kg QTL-0506: 2043mm x 868mm x 1956mm / 116.4 Kg QTL-0507: 1006mm x 523mm x 1444mm / 43.8 Kg QTL-0508: 1138mm x 558mm x 1444mm / 42.8 Kg QTL-0509: 1856mm x `550mm x 1656mm / 45.6 Kg QTL-0510: 1742mm x `726mm x 2256mm / 89.6 Kg QTL-0511: 1880mm x `400mm x 1656mm / 52.4 Kg QTL-0512: 1049mm x `568mm x 1137mm / 41.1 Kg QTL-0513: 2190mm x 537mm x 1370mm / 83Kg QTL-0514: 1662mm x 1632mm x 700mm / 80Kg QTL-0515: 1571mm x 542mm x 1440mm / 85Kg QTL-0516: 1875mm x 868mm x 2250mm / 96Kg
3	Bedienelemente <i>Operating elements</i>	N/A
4	Ausstattung / Zubehör <i>Equipment / Accessories</i>	N/A
5	Verwendete Materialien <i>Used materials</i>	Metal & Plastic
6	Sonstiges <i>Other</i>	Products pics see Appendix (Products Pics) at the end of the report.

Prüfbericht-Nr.: 50045614 008
Test Report No.:

Seite 4 von 12
Page 4 of 12

Absatz		Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

EN 16630:2015		Permanently installed outdoor fitness equipment - Safety requirements and test methods		
4.3	Design and manufacture			
4.3.1	General			
	Fitness equipment shall be designed or set-up/assembled so that the intended use is/are easily identified by the user. It shall be considered during the planning and design of fitness equipment that such equipment should also be accessible for people with limited capabilities and should be useable in accordance with these capabilities. Fitness equipment shall be designed so that marginally incorrect executions of exercises do not lead to serious damage for the user. When at rest the fitness equipment shall automatically adjust so that the equipment is ready for the following user. The equipment should be designed so that the user cannot attain a constrained posture. Fitness equipment shall not permit the functions neck pressing (see Figure 4) and deadlifting (see Figure 5). NOTE The aim of this requirement is to avoid excessive compression of the spinal column.  Figure 4 — Neck press  Figure 5 — Deadlift	<i>All the samples:</i> Ok. Ok. Ok. Ok. <i>No constrained posture.</i>	P ☒ F ☐ N/A ☐ N/T ☐	

Prüfbericht-Nr.: 50045614 008
Test Report No.:

Seite 5 von 12
Page 5 of 12

Absatz		Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

4.3.2	Structural integrity Fitness equipment shall be permanently connected to the substrate on which it stands. For fitness equipment, the structural integrity shall be proved for the worst case of the intended combinations. Structural integrity, including stability, of the equipment shall be evaluated by one of the following methods: a) calculation on the basis of the applicable specifications in EN 1176-1:2008, Annex A and Annex B, except for Table A.1; Table 1 of this standard should be used instead; b) physical testing, in accordance with EN 1176-1:2008, Annex C (using weights in accordance with Table 1); c) combination of a) and b). Table 1 — Calculation of loads caused by the users <table><tr><th>Number of users</th><th>Mass of <i>n</i> users</th><th>Dynamic factor</th><th>Total vertical load of users</th><th>Vertical load per user</th></tr><tr><td><i>n</i></td><td><i>G_n</i> kg</td><td><i>C_{dyn}</i></td><td><i>F_{tot,v}</i> N</td><td><i>F_{1,v}</i> N</td></tr><tr><td>1</td><td>99</td><td>2</td><td>1 942</td><td>1 942</td></tr><tr><td>2</td><td>185</td><td>1,5</td><td>2 722</td><td>1 361</td></tr><tr><td>3</td><td>270</td><td>1,33</td><td>3 523</td><td>1 174</td></tr><tr><td>4</td><td>353</td><td>1,25</td><td>4 329</td><td>1 082</td></tr><tr><td>5</td><td>438</td><td>1,20</td><td>5 133</td><td>1 027</td></tr></table> NOTE Values are rounded. The loads resulting from users of fitness equipment shall be based on the formulae: $G_n = n \times m + 1,64 \times \sigma \sqrt{n}$$C_{dyn} = \frac{1+n}{n}$ where <i>G_n</i> is the total mass of <i>n</i> user (kg); <i>n</i> is the numbers of users; <i>m</i> is the mean mass of the user; <i>σ</i> is the standard deviation of the <i>σ</i> user. NOTE For free accessible fitness equipment the following values can be used: <i>m</i> = 78 kg (This value is based on data from age 18–85 of adult men 50 percentile) <i>σ</i> = 12,6 kg	Number of users	Mass of <i>n</i> users	Dynamic factor	Total vertical load of users	Vertical load per user	<i>n</i>	<i>G_n</i> kg	<i>C_{dyn}</i>	<i>F_{tot,v}</i> N	<i>F_{1,v}</i> N	1	99	2	1 942	1 942	2	185	1,5	2 722	1 361	3	270	1,33	3 523	1 174	4	353	1,25	4 329	1 082	5	438	1,20	5 133	1 027	QTL-0503;QTL-0505;QTL-0509: 0.3x150Kg=45Kg= 450N was loaded on each handle bar. (No whole body load on the product when in use.) QTL-0502;QTL-0507;QTL-0508;QTL-0512: 1942Nx1.35=2621.7N was loaded on the seat and platform, and 0.3x150Kg=45Kg= 450N was loaded on each handle bar. (Max. 1 person use.) QTL-0501;QTL-0506;QTL-0510;QTL-0511;QTL-0513;QTL-0514;QTL-0515;QTL-0516: 2722Nx1.35=3674.7N was loaded on the seats and platform, and 0.3x150Kg=45Kg= 450N was loaded on each handle bar. (Max. 2 persons use.) QTL-0504: 3523Nx1.35=4756.05N was loaded on the discs, and 0.3x150Kg=45Kg= 450N was loaded on each handle bar. (Max. 3 persons use)	P☒ F☐ N/A☐ N/T☐
Number of users	Mass of <i>n</i> users	Dynamic factor	Total vertical load of users	Vertical load per user																																		
<i>n</i>	<i>G_n</i> kg	<i>C_{dyn}</i>	<i>F_{tot,v}</i> N	<i>F_{1,v}</i> N																																		
1	99	2	1 942	1 942																																		
2	185	1,5	2 722	1 361																																		
3	270	1,33	3 523	1 174																																		
4	353	1,25	4 329	1 082																																		
5	438	1,20	5 133	1 027																																		
4.3.3	Surface finish of accessible parts of equipment There shall be no protruding nails, protruding wire rope terminations, pointed or sharp-edged components. Wooden equipment shall be made of wood with a low susceptibility to splintering. The surface finish of equipment made of other materials (e.g. glass fibre) shall be non-splintering. Rough surfaces shall not present any risk of injury. All weld seams shall be smooth. Protruding bolt threads	All the samples: No protruding risk part. All welding is flat. Nuts are covered by caps.	P☒ F☐ N/A☐ N/T☐																																			

Prüfbericht-Nr.: 50045614 008
Test Report No.:

Seite 6 von 12
Page 6 of 12

Absatz		Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

shall be permanently covered on all accessible parts of equipment (e.g. with dome headed nuts). Nuts and bolt heads that protrude less than 8 mm are permissible on inaccessible parts, provided that they are free from burrs.

Corners, edges and protruding parts within the training space that protrude more than 8 mm, and which are not shielded by adjacent areas that are not more than 25 mm away from the end of the protruding part, shall be rounded off. The minimum radius of the curve shall be 3 mm. Only edges that the user might hit while using the product need to be rounded.

NOTE This requirement is intended to prevent injuries caused by unintentional contact with components.

Figure 6 shows examples of protection for nuts and bolts and of permissible protruding parts.

No such point.

See above.

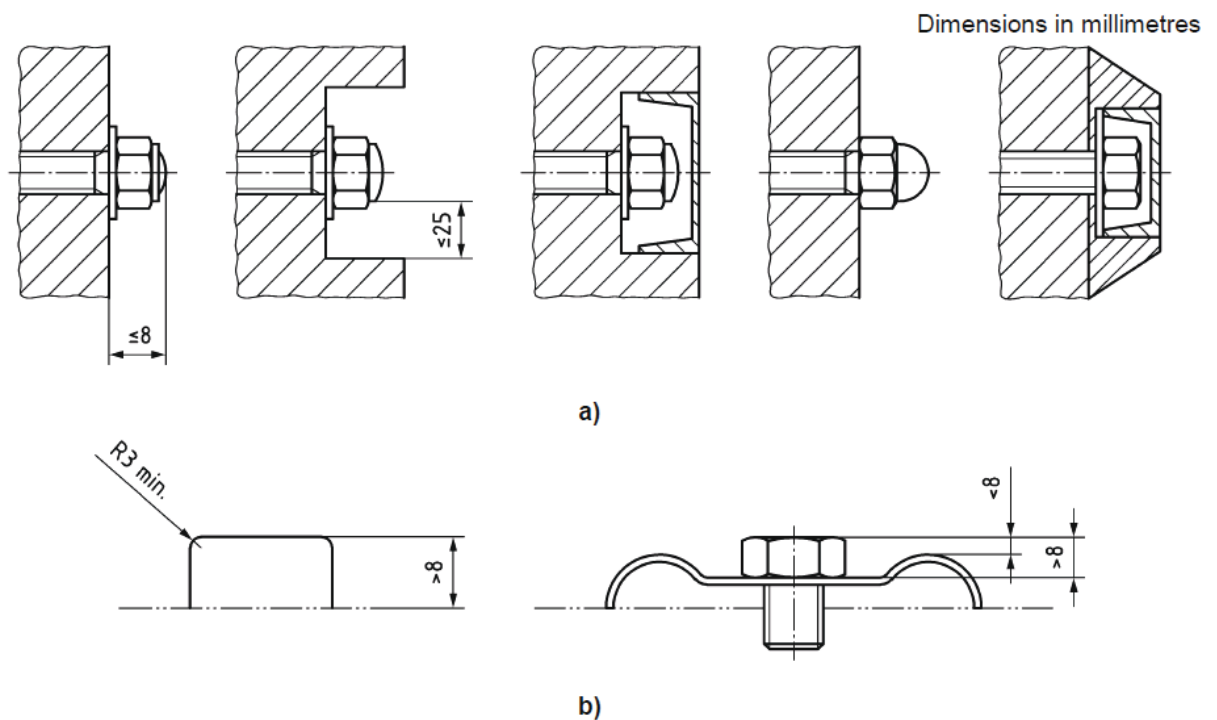


Figure 6 — Examples of protection and permissible protruding parts

4.3.4 Tread surface

If the equipment is provided with a tread surface, this shall be equipped with a slip-resistant finish. Tread surfaces shall be designed so that liquid can drain off. A tread surface with a minimum width of 100 mm and minimum length of 300 mm shall be available per foot.

QTL-0501: 265X320X15-40mm


QTL-0507: 130X320X20mm
QTL-0508: 130X320X20mm

P ☒
F ☐
N/A ☐
N/T ☐

Prüfbericht-Nr.: 50045614 008
Test Report No.:

Seite 7 von 12
Page 7 of 12

Absatz		Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

	Additionally, the tread surface shall provide at least a three-sided safeguard (at the front, left and right) that is a minimum of 10 mm high and extends over a length of 75 % of the side surface. This requirement is not applicable to rotary discs with a diameter of at least 320 mm.	QTL-0513: 320 x 125 x 20mm QTL-0515: 320 x 125 x 20mm Others: N/A	
4.3.5	Moving parts		
	There shall be no crushing or shearing points for the user between moving and/or stationary parts of the equipment during use. The distance from moving parts to adjacent moving or fixed parts shall be either < 8 mm or ≥ 25 mm, if only the fingers are at risk. Otherwise, it shall be either < 8 mm or ≥ 60 mm. Any trailing of pedalling equipment shall be reduced by technical means, e.g. braking, free wheel. For the following rotating parts, trailing shall be reduced by technical means: — rotary discs with open surfaces; — rotary discs with hand grips. The distance between the bottom end of a moving part and the ground shall be at least 60 mm. If the vertically moving parts are found outside of the user's field of view then the distance between vertically moving parts and the ground shall be at least 110 mm. For rotating user stations (e.g. rotary discs and rotating seats), a guideline of user direction and marking of the original position shall be conspicuous. End stops shall be dampened. Open end stops shall have a minimum diameter of 35 mm (see Figure 7). End stops in the head, hand or foot areas that are open during the exercise shall not be permissible.  Key 1 = open end stop Figure 7 — Example of open end stop Pulleys and similar parts shall be protected against body parts becoming entrapped. Rotating user stations shall not exceed a maximum	<i>All the samples:</i> Ok. QTL-0503;QTL-0504;QTL-0505: Ok. Resistance was provided. <i>All the samples:</i> Ok. QTL-0516: Ø45mm N/A <i>All the samples:</i> Ok.	P ☒ F ☐ N/A ☐ N/T ☐

Prüfbericht-Nr.: 50045614 008
Test Report No.:

Seite 8 von 12
Page 8 of 12

Absatz		Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

	deflection of 105° to the left and right from the body centre line respectively, during use while standing or sitting. Movement damping shall start from 90° and cease at the limit of deflection. For swinging movements, a movement limitation of < 55° from the vertical shall be available.	QTL-0501;QTL-0507;QTL-0513;QTL-0515: Less than 55°.	
4.3.6	Entrapment		
4.3.6.1	Entrapment of the head and neck		
	Entrapment of the head and neck is not considered hazardous, if the lowest part of an accessible opening lies less than 600 mm above the ground surface. Accessible, completely bound openings shall be tested in accordance with 5.2.2.1 if the lowest part of an accessible opening lies more than 600 mm above the ground. Probes E or C shall thereby not fit through any of these openings, unless the large probe D fits through as well (see Figure 13). Partially bound and V-shaped openings shall be designed so that the opening is either not accessible or, if the opening is accessible at a position of 600 mm above the ground surface, it shall correspond to the following, depending on the angular orientation range (see Figure 16): — Range 1: (template centre line $\pm 45^\circ$ from vertical); when the template apex contacts the base of the opening, the depth of the opening shall be less than the length of the template to the under-side of the shoulder section. — Range 2: (template centre line from horizontal to $+ 45^\circ$); when the template apex contacts the base of the opening, the depth of the opening shall be less than the 'A' portion of the template. If the depth of the opening is greater than the 'A' portion of the template, all parts of the opening above the 'A' portion shall also allow insertion of the shoulder section of the template or probe D. — Range 3: No template test requirements. Test in accordance with 5.2.2.2.	<i>All the samples:</i> <i>No such hazard.</i> <i>No such hazard.</i> <i>No such hazard.</i> <i>See above.</i>	P ☒ F ☐ N/A ☐ N/T ☐
4.3.6.2	Entrapment of fingers		
	Fitness equipment shall be designed so that dangerous situations, including: — gaps in which fingers can be trapped while the remainder of the body is moving or continues in forced movement; — pipes with open ends; and — variable gaps, in which this type of entrapment can be encountered, are not created. Openings and holes which have a lower edge of more	<i>All the samples:</i> <i>No trap for fingers was found.</i>	P ☒ F ☐ N/A ☐ N/T ☐

Prüfbericht-Nr.: 50045614 008
Test Report No.:

Seite 9 von 12
Page 9 of 12

Absatz		Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

	than 1 000 mm above the ground surface shall conform to the following requirements when tested in accordance with 5.2.3: a) the 8 mm finger probe shall not fit through the minimum cross-section of the opening and the profile of the opening shall be such that the finger probe cannot be locked in any position when set in motion as shown in Figure 21; b) if the 8 mm finger probe fits through the opening, the 25 mm finger rod (see Figure 20) shall also fit through the opening, provided that the opening does not permit access to another finger entrapment site. The ends of pipes shall be closed off. Closures shall not be removable without tools.	The ends of pipes were closed off. Closures could not be removable without tools.	
4.3.6.3	Entrapment of the foot or leg		
	Surfaces intended for running/walking shall not contain any gaps, openings or projecting parts which may cause unexpected foot or leg entrapment. Gaps in the main direction of travel shall not be greater than 30 mm when measured across the direction of travel (see Figure 8).  Figure 8 — Measurement of gaps limited to 30 mm	<i>All the samples:</i> <i>No such hazard.</i>	P ☒ F ☐ N/A ☐ N/T ☐

Prüfbericht-Nr.: 50045614 008
Test Report No.:

Seite 10 von 12
Page 10 of 12

Absatz		Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

Appendix (Products Pics)



QTL-0501



QTL-0502



QTL-0503



QTL-0504



QTL-0505



QTL-0506

Prüfbericht-Nr.: 50045614 008
Test Report No.:

Seite 11 von 12
Page 11 of 12

Absatz		Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation



QTL-0507



QTL-0508



QTL-0509



QTL-0510



QTL-0511



QTL-0512

Prüfbericht-Nr.: 50045614 008
Test Report No.:

Seite 12 von 12
Page 12 of 12

Absatz		Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation



QTL-0513



QTL-0514



QTL-0515



QTL-0516

END of Test Report

ATTACHMENT 1 OF TEST REPORT 50045614 008

QMF-OD-32016SHG

Product designation: Outdoor fitness equipment
Certificate No.: S 50499268 0001
Test report No.: 50045614 008

Material list for PAHs risk assessment; Only materials accessible without tools

Material / Component #	Location / Function of the material	Name / Description of the material	PAH relevant 1)	Evidence attached, Institute, report no., date	Category	Smell	Rigidity	Colour	Chem. test needed?	Test result (within the given limits)
1	Handle	Plastic	☒ Yes ☐ No	TUV Rheinland 244320938a 001 15.07.2021	☐ 1 ☒ 2 ☐ 3	☐ Yes ☒ No	☐ Soft ☐ Flexible ☒ Rigid	☒ Black or dark-colored ☐ White or light-colored	☐ No ☒ Yes	☒ passed ☐ failed
2	Tube	Coating	☒ Yes ☐ No	TUV Rheinland 244320938a 001 15.07.2021	☐ 1 ☒ 2 ☐ 3	☐ Yes ☒ No	☒ Soft ☐ Flexible ☐ Rigid	☒ Black or dark-colored ☐ White or light-colored	☐ No ☒ Yes	☒ passed ☐ failed
3	Seat	Plastic	☒ Yes ☐ No	TUV Rheinland 244320938a 001 15.07.2021	☐ 1 ☒ 2 ☐ 3	☐ Yes ☒ No	☐ Soft ☐ Flexible ☒ Rigid	☒ Black or dark-colored ☐ White or light-colored	☐ No ☒ Yes	☒ passed ☐ failed
4	Base cover	Plastic	☒ Yes ☐ No	TUV Rheinland 244320938a 001 15.07.2021	☐ 1 ☒ 2 ☐ 3	☐ Yes ☒ No	☐ Soft ☐ Flexible ☒ Rigid	☒ Black or dark-colored ☐ White or light-colored	☐ No ☒ Yes	☒ passed ☐ failed
5	Handle cover	Plastic	☒ Yes ☐ No	TUV Rheinland 244320938a 001 15.07.2021	☐ 1 ☒ 2 ☐ 3	☐ Yes ☒ No	☐ Soft ☐ Flexible ☒ Rigid	☒ Black or dark-colored ☐ White or light-colored	☐ No ☒ Yes	☒ passed ☐ failed
6	Plug	Plastic	☒ Yes ☐ No	TUV Rheinland 244320938a 001 15.07.2021	☐ 1 ☒ 2 ☐ 3	☐ Yes ☒ No	☐ Soft ☐ Flexible ☒ Rigid	☒ Black or dark-colored ☐ White or light-colored	☐ No ☒ Yes	☒ passed ☐ failed

ATTACHMENT 1 OF TEST REPORT 50045614 008

QMF-OD-32016SHG

			
QTL-0501	QTL-0502	QTL-0503	QTL-0504
			
QTL-0505	QTL-0506	QTL-0507	QTL-0508
			
QTL-0509	QTL-0510	QTL-0511	QTL-0512

ATTACHMENT 1 OF TEST REPORT 50045614 008

QMF-OD-32016SHG


			
QTL-0513	QTL-0514	QTL-0515	QTL-0516

我在这里声明，如下所列内容为我司申请 TUV 证书产品中的材料和随附 PAHs 测试报告中材料一致。

I herewith declare that the below listed materials are used in our product submitted to GS- certification and conform with the attached PAHs test reports.

地点/Place Wien, China 日期/Date 2024.8.12


申请人盖章和签名 (Applicant's seal and legally binding signature)



Risk assessment for the above mentioned product indicates PAH relevance :
☒ Yes ¹⁾ ☐ No

☐ Short statement

Bryan Chen / PE Bryan Chen

Prüfbericht-Nr.: <i>Test Report No.:</i>	Attachment 2 of 50045614 008	Auftrags-Nr.: <i>Order No.:</i>	244320938	Seite 1 von 7 Page 1 of 7
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	29.03.2021	
Auftraggeber: <i>Client:</i>	Qitele Group Co., Ltd. Address: Xiaojing Industry Zone, Qiaoxia Town, Yongjia County, Wenzhou, Zhejiang 325106, P.R.China			
Prüfgegenstand: <i>Test item:</i>	Permanently installed outdoor fitness equipment			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	QTL-0501;QTL-0502;QTL-0503;QTL-0504;QTL-0505;QTL-0506;QTL-0507;QTL-0508;QTL-0509;QTL-0510;QTL-0511;QTL-0512;QTL-0513;QTL-0514;QTL-0515;QTL-0516			
Auftrags-Inhalt: <i>Order content:</i>	Certificate update			
Prüfgrundlage: <i>Test specification:</i>	2 PfG 2516:2014-11 Checkliste für die Warenkontrollprüfung <i>Checklist for the Product Control Test</i>			
Wareneingangsdatum: <i>Date of receipt:</i>	29.03.2021	Detaillierte Fotodokumentation Seite 3 und / oder Anlage zu diesem Bericht <i>Detailed photo documentation page 3 and / or appendix to this report</i>		
Prüfmuster-Nr.: <i>Test sample No.:</i>	Same as Type No.			
Prüfzeitraum: <i>Testing period:</i>	29.03.2021 – 10.08.2021			
Ort der Prüfung: <i>Place of testing:</i>	See other			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shanghai) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
10.08.2021	Bryan Chen / PE		11.08.2021	Terry Jin / TC
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>
Sonstiges / Other: Foreseeable use was considered. Currently neither a safeguard clause procedure has been invoked nor is an increase in accidents known for these products. All the models identical with previous certified models in test report 50045614 001/003.				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
5 = mangelhaft N/T = nicht getestet				
5 = poor N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Liste der verwendeten Prüfmittel
List of used test equipment

[illegible]

Prüfbericht-Nr.: Attachment 2 of 50045614 008
Test Report No.:

Seite 3 von 7
Page 3 of 7

Produktbeschreibung
Product description

1	Produktdetails <i>Product details</i>	QTL-0501;QTL-0502;QTL-0503;QTL-0504;QTL-0505; QTL-0506;QTL-0507;QTL-0508;QTL-0509;QTL-0510; QTL-0511;QTL-0512;QTL-0513;QTL-0514;QTL-0515;QTL-0516 Max user weight:150 Kg For user has the height more than 1400 mm.
2	Maße / Gewicht <i>Dimensions / Weight</i>	QTL-0501: 1128mm x 896mm x 1306mm / 47.2 Kg QTL-0502: 1374mm x 828mm x 1188mm / 46 Kg QTL-0503: 880mm x 619mm x 1715mm / 37.9 Kg QTL-0504: 1535mm x 365mm x 1255mm / 42.1 Kg QTL-0505: 1040mm x 1009mm x 1445mm / 41.3 Kg QTL-0506: 2043mm x 868mm x 1956mm / 116.4 Kg QTL-0507: 1006mm x 523mm x 1444mm / 43.8 Kg QTL-0508: 1138mm x 558mm x 1444mm / 42.8 Kg QTL-0509: 1856mm x `550mm x 1656mm / 45.6 Kg QTL-0510: 1742mm x `726mm x 2256mm / 89.6 Kg QTL-0511: 1880mm x `400mm x 1656mm / 52.4 Kg QTL-0512: 1049mm x `568mm x 1137mm / 41.1 Kg QTL-0513: 2190mm x 537mm x 1370mm / 83Kg QTL-0514: 1662mm x 1632mm x 700mm / 80Kg QTL-0515: 1571mm x 542mm x 1440mm / 85Kg QTL-0516: 1875mm x 868mm x 2250mm / 96Kg
3	Bedienelemente <i>Operating elements</i>	N/A
4	Ausstattung / Zubehör <i>Equipment / Accessories</i>	N/A
5	Verwendete Materialien <i>Used materials</i>	Metal & Plastic
6	Sonstiges <i>Other</i>	N/A

Prüfbericht-Nr.: Attachment 2 of 50045614 008
Test Report No.:

Seite 4 von 7
Page 4 of 7

Absatz	2 PfG 2516:2014-11	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

1	Produkt Product		
	Äußere Erscheinung des Musters stimmt mit der Fotodokumentation überein. <i>Outer appearance of the drawn sample is same as in photo documentation.</i>	Outer appearance of sample is the same as the certified product.	P ☒ F ☐ N/A ☐ N/T ☐
	Interner Aufbau stimmt mit der Fotodokumentation überein. <i>Internal construction of the drawn sample is same as in photo documentation.</i>	Internal construction of sample is the same as the certified product.	P ☒ F ☐ N/A ☐ N/T ☐
	Es wurden nur sicherheitsrelevanten Komponenten verbaut, die CDF oder Prüfbericht benannt sind. <i>Only safety relevant components as described in CDF or Test Report have been used in the drawn sample.</i>	Products are same as certified products.	P ☒ F ☐ N/A ☐ N/T ☐
2	Typenschild Label		
	Das Typenschild entspricht dem zertifizierten. <i>The label is same as the certified one.</i>	Same as previous one.	P ☒ F ☐ N/A ☐ N/T ☐
	Der Ausweisinhaber, Importeur oder Bevollmächtigte ist auf dem Typenschild benannt. <i>The license holder, importer or authorized representative is displayed in the label.</i>	The information of license holder is displayed in the product.	P ☒ F ☐ N/A ☐ N/T ☐
	Die Adresse (bei GS zwingend eine aus dem EWR) ist auf dem Typenschild benannt. <i>Complete postal address (for GS it must be a European address) is mentioned in the label.</i>	Ok.	P ☒ F ☐ N/A ☐ N/T ☐
	Bei Fail: in Bedienungsanleitung angegeben <i>If fail: in the user manual</i>		
	Bei Fail: auf der Verpackung angegeben <i>if fail: on packaging</i>		
	Wenn eine CE Markierung notwendig ist, wurde diese auf dem Typenschild in dem richtigen Layout abgebildet. <i>If CE marking is mandatory, it's on the product and apparently complies with the design restrictions.</i>	Not applicable.	P ☐ F ☐ N/A ☒ N/T ☐

Prüfbericht-Nr.: Attachment 2 of 50045614 008
Test Report No.:

Seite 5 von 7
Page 5 of 7

Absatz	2 PfG 2516:2014-11	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation
	Wenn ein TÜV Rheinland Zeichen abgebildet ist, entspricht dies den Vorgaben. <i>In event a TUV Mark is displayed it complies with the design restrictions.</i>	No TUV mark on the products. GS mark with TUV RL logo is displayed and complies with the design restrictions.	P ☐ F ☐ N/A ☒ N/T ☐
3	Bedienungs-, Installations-, Aufbauanleitung User Manual, Installation - / Assembly Manual		
	Liegt in der richtigen Sprache vor, bei GS zwingend in deutscher Sprache, und entspricht dem zertifizierten. <i>Is available in the correct language (German version a must for GS) and the same as certified one.</i>	Comply.	P ☒ F ☐ N/A ☐ N/T ☐
	Wenn ein TÜV Rheinland Zeichen abgebildet ist, entspricht dies den Vorgaben. <i>In event a TUV Mark is displayed it complies with the design restrictions.</i>	Comply.	P ☒ F ☐ N/A ☐ N/T ☐
	Wenn eine Herstelleradresse angegeben ist, wurde diese komplett (bei GS zwingend eine Adresse im EWR) angegeben und stimmt mit der vom Typen-schild überein. <i>If the license holder and/or importer, authorized representative is displayed with address, it's complete (for GS it must be a European address) and correlates with the information on the rating label.</i>	Comply.	P ☒ F ☐ N/A ☐ N/T ☐
	Wenn die Serviceadresse von der vom Hersteller, Importeur oder Bevollmächtigten abweicht, ist das akzeptabel. <i>If the address for service inquiries differs from manufacturer's, importer's or authorized representative's, it's acceptable.</i>		
4	Verpackung Packaging/Gift box		
	Wenn ein TÜV Rheinland Zeichen abgebildet ist, entspricht dies den Vorgaben. <i>In event a TUV Mark is displayed it complies with the design restrictions.</i>	Not applicable.	P ☐ F ☐ N/A ☒ N/T ☐
	Der Ausweisinhaber, Importeur und/oder Bevollmächtigte ist mit auf der Verpackung benannt. <i>The license holder, importer and/or authorized representative are displayed with complete address on the packaging.</i>	Not applicable.	P ☐ F ☐ N/A ☒ N/T ☐

Prüfbericht-Nr.: Attachment 2 of 50045614 008
Test Report No.:

Seite 6 von 7
Page 6 of 7

Absatz	2 PfG 2516:2014-11	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation
	Auf der Verpackung wird das Produkt nicht anders beworben als es die Zertifizierung beschreibt. Z.B. Kinder werden mit der Verpackung explizit angesprochen und aus dem Zertifikat geht hervor, dass es kein Spielzeug ist. <i>Packaging does not imply another use as certified. E.g. the package explicitly addresses but the certificate excludes use by children.</i>	Not applicable.	P ☐ F ☐ N/A ☒ N/T ☐

ANLAGE zum Prüfbericht-Nr.: Attachment 2 of 50045614 008
APPENDIX to Test Report No.:

Seite 7 von 7
Page 7 of 7

ZUSATZ-DOKUMENTATION
ADDITIONAL DOCUMENTATION

Nachweise für die in der Checkliste benannten Punkte:
Evidences found during Product Verification Test:

